

Vented Light Traction

Technical data sheet

FF types

Technical features:

- Vented batteries with positive flat (grid) plates
- Good high-rate discharge capability
- Optimized chargers are available for all blocks

Standards & certifications:

- 300 cycles according to IEC 60254-1



Nominal capacity
40.0-297 Ah C₅
50.0-385 Ah C₂₀



Block battery



Grid plate



300 cycles in
accordance with
IEC 60254-1



Recyclable



Special high
current
performance

Technical characteristics and data

Type	Nominal voltage	Nominal capacity		Length	Width	Height	Weight*	Terminal	Terminal position
		C ₅ (30 °C)	C ₂₀ (30 °C)	(l)	(w)	(h)			
	V	Ah	Ah	max. mm	max. mm	max. mm	kg		
FF 06 187 L	6	187	232	260	181	286	28.0	A- / WNT-Terminal	1
FF 06 200 1	6	200	235	246	190	272	32.0	A-Terminal	1
FF 06 200 2	6	200	235	265	184	269	29.0	A-Terminal	1
FF 06 255	6	255	285	313	184	355	49.0	A-Terminal	1
FF 06 297 L	6	297	385	302	181	425	50.0	A- / WNT-Terminal	1
FF 08 147 K	8	147	183	260	181	286	30.4	WNT-Terminal	2
FF 12 040	12	40.0	50.0	210	175	190	13.7	A-Terminal	3
FF 12 050	12	50.0	62.0	242	175	190	17.3	A-Terminal	3
FF 12 060	12	60.0	75.0	278	175	190	20.7	A-Terminal	3
FF 12 080 1	12	80.0	100	353	175	190	26.4	A-Terminal	3
FF 12 080 2	12	80.0	100	349	175	235	29.2	A-Terminal	3
FF 12 085	12	85.0	110	328	174	216	27.0	A-Terminal	2
FF 12 105	12	105	125	513	189	223	34.5	A-Terminal	4
FF 12 110	12	110	130	349	175	285	32.0	A-Terminal	3
FF 12 135	12	135	180	513	223	223	47.8	A-Terminal	4
FF 12 158 L	12	158	200	397	179	378	49.4	A- / WNT-Terminal	3

* The weights may exhibit a tolerance of +/-5%

Manufacturer: by /**MERICAS**
Exide Technologies SLU • Carretera A-2, km 41,800
19200 Azuqueca de Henares • Guadalajara, Spain

mericas-energy.com




Vented Light Traction


Technical data sheet

FF-types

Drawings, terminal and torque

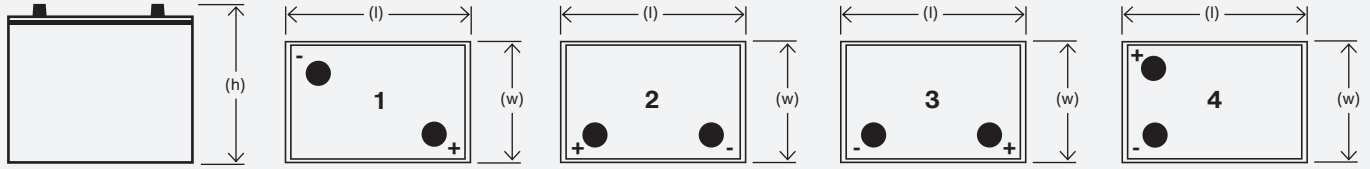

Not to scale!



8 Nm



16 Nm

Manufacturer: by /**MERICAS**
Exide Technologies SLU • Carretera A-2, km 41,800
19200 Azuqueca de Henares • Guadalajara, Spain

mericas-energy.com

 **MERICAS**[®]