

# Vented Light Traction

## Technical data sheet

### FT types

#### Technical features:

- Vented batteries with positive tubular plates
- Reliable and durable
- Good performance values for medium and low discharge currents
- Optimized chargers are available for all blocks

#### Standards & certifications:

- 900 cycles according to IEC 60254-1



Nominal capacity  
110-200 Ah C<sub>5</sub>  
132-235 Ah C<sub>20</sub>



Block battery



Tubular plate



900 cycles in accordance with IEC 60254-1




Recyclable

#### Technical characteristics and data


Type	Nominal voltage V	Nominal capacity		Length (l) max. mm	Width (w) max. mm	Height (h) max. mm	Weight* kg	Terminal	Terminal position
		C <sub>5</sub> (30 °C) Ah	C <sub>20</sub> (30 °C) Ah						
FT 06 180 1	6	180	210	246	190	276	29.0	A-Terminal	1
FT 06 180 2	6	180	210	265	184	269	29.0	A-Terminal	1
FT 06 200	6	200	235	265	185	269	32.0	A-Terminal	1
FT 12 110	12	110	132	347	176	285	39.0	A-Terminal	3

\* The weights may exhibit a tolerance of +/-5%

#### Drawings, terminal and torque

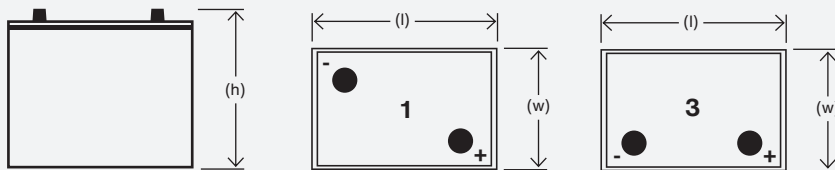

Not to scale!



8 Nm

Manufacturer: by /**MERICAS**  
Exide Technologies SLU • Carretera A-2, km 41,800  
19200 Azuqueca de Henares • Guadalajara, Spain

[mericas-energy.com](http://mericas-energy.com)

**MERICAS**<sup>®</sup>